

NATE

www.natekj.com

NATE DRIVE

NT33- AD-VA2

The AD-VA2 is a two-stage high-thrust aluminum lifting column with high load capacity and high stability. It is suitable for height adjustment in applications such as control consoles, workbenches, or kitchens where high thrust and stability are required.

---

characteristic :

Maximum load: 2000 N (per lift column)

Maximum speed under no-load : 15 mm/s

Maximum speed under full load : 12mm/s

Installation dimensions: 640 mm


OK Range : 480mm

Running sound : < 50 db

Rising bollard dimensions: 200*160 mm (external)
183*143 mm (internal)

Number of sections: Two sections

electricity Voltage: 24V

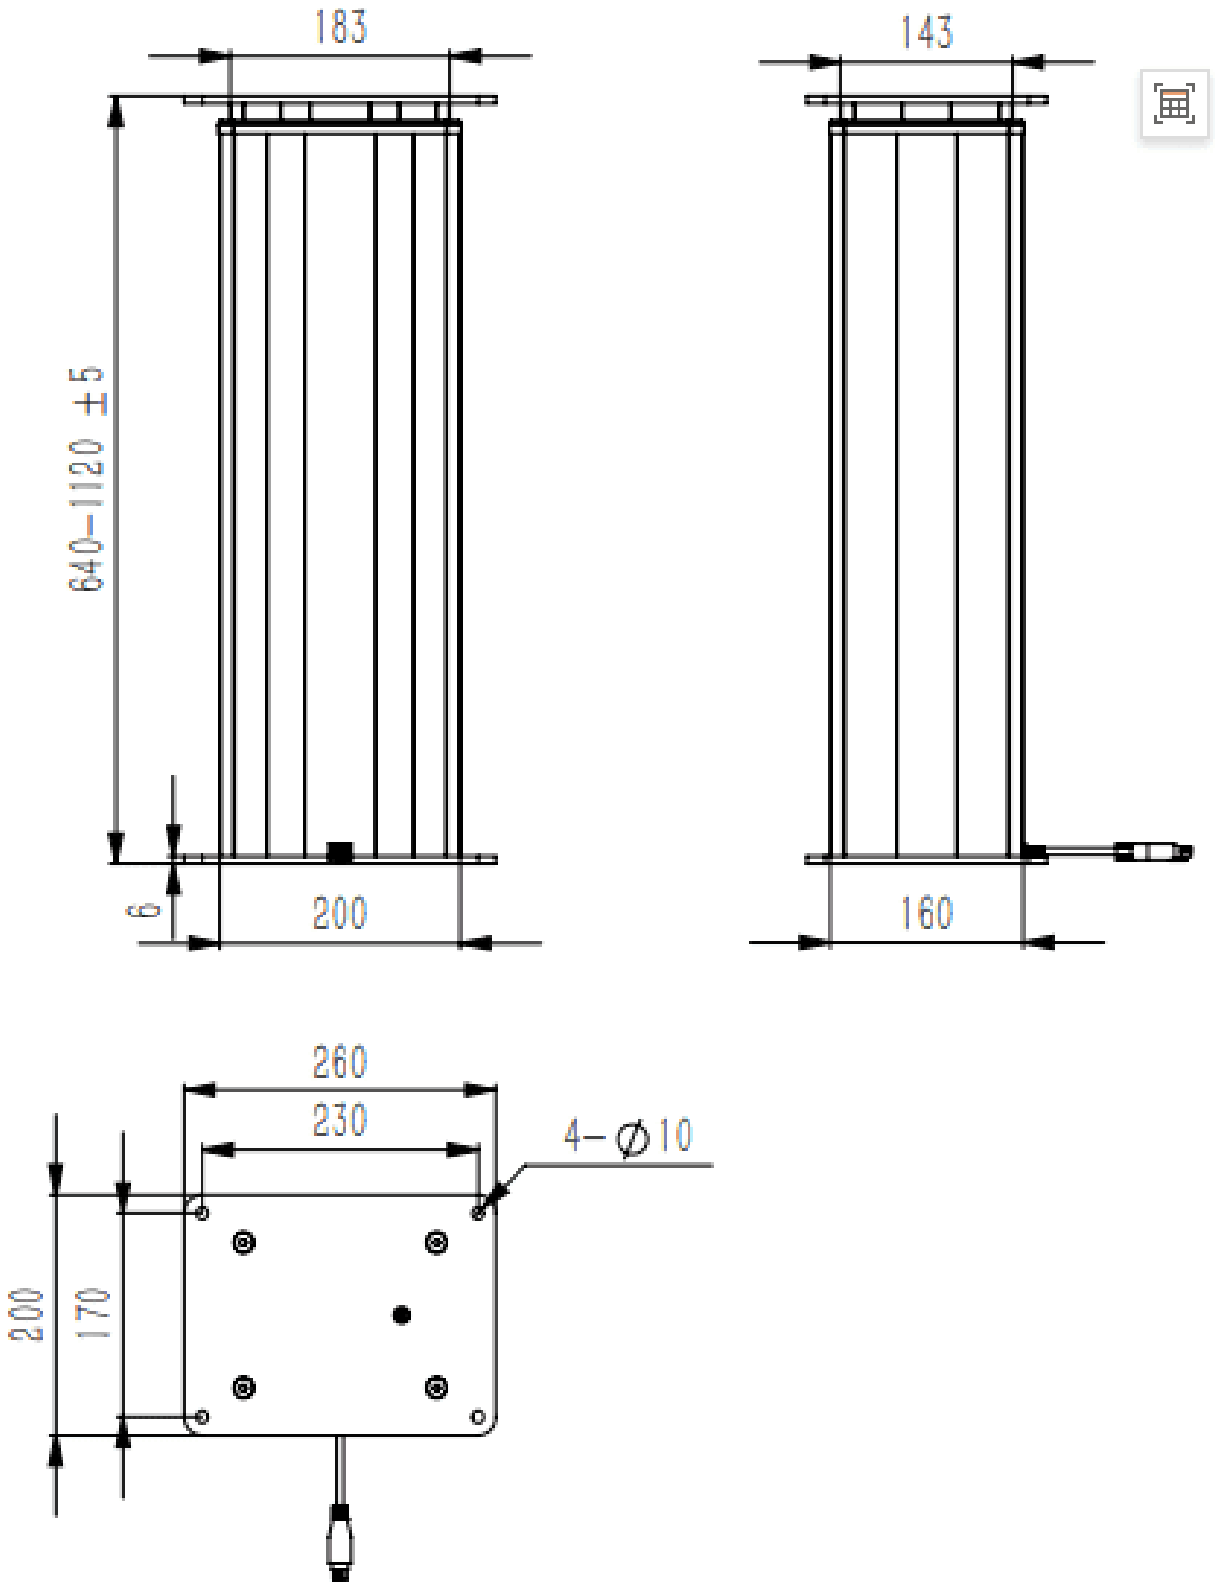

For installation instructions and usage guidelines, please refer to the relevant user manual.