


NT33-GD-2TDIF3-KJA76-C12B-FA181

PRODUCT SPECIFICATION SHEET

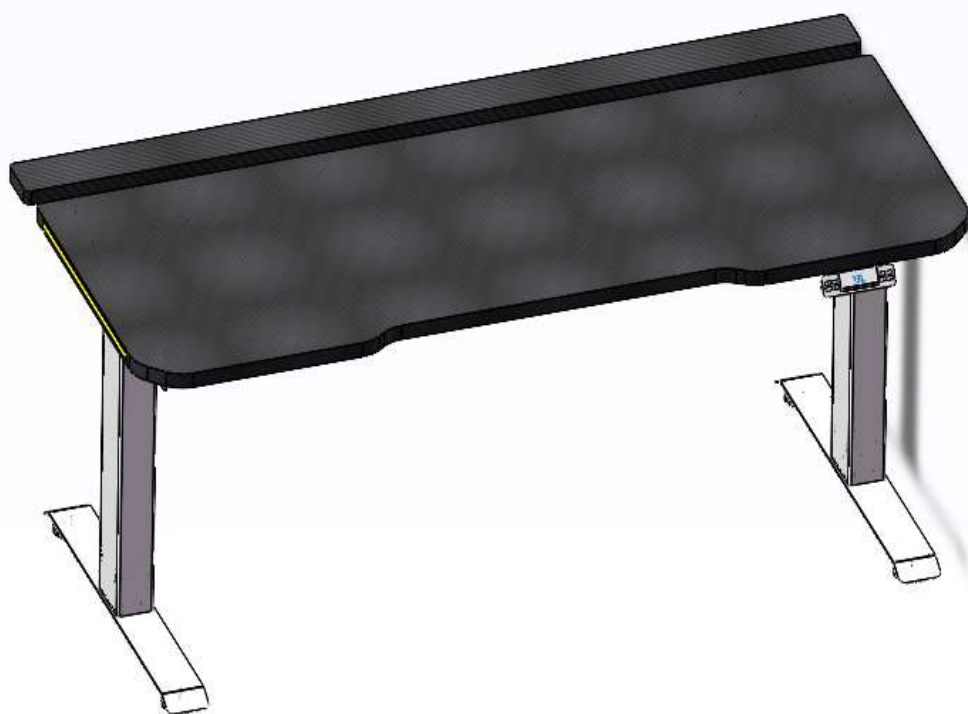


PRODUCT SPECIFICATION SHEET

NT33-GD-2TDIF3-KJA76-C12B-

FA181

PRODUCT SPECIFICATIONS

Motor Type: 3 Motors / Brushed
Column Type: 2-Leg, 3-Stage, Standard
Orientation, Rectangular / Hole-Free
Column Size: 95.5 × 65.5 / 90 × 60 / 85 × 55 mm
Height Adjustment Range: 600–1250 ± 5 mm
Column Stroke: 650 mm
Frame Width Adjustment Range: 1010–1750 ± 5 mm
Compatible Desktop Length: 1200–1800 mm
Side Bracket Length: 620 mm
Foot Size: 750 × 85 mm
Maximum Desk Load: 120 kg / 264 lbs
Maximum Speed: 40 mm/s
Noise Level: ≤ 50 dB (No Load)
Functions: Anti-Collision Safety Protection / Sedentary Reminder, etc.
Standby Power Consumption: < 0.1 W
Finish: White Powder Coating (Standard Color)
 Black Powder Coating (Standard Color)
 Gray Powder Coating (Standard Color)
Package Size: Desk Frame: 1060 × 290 × 210 mm
 Desktop: 1580 × 815 × 55 mm
Gross / Net Weight: Desk Frame: 29.23 kg / 31.23 kg
 Desktop: 21.35 kg / 24 kg

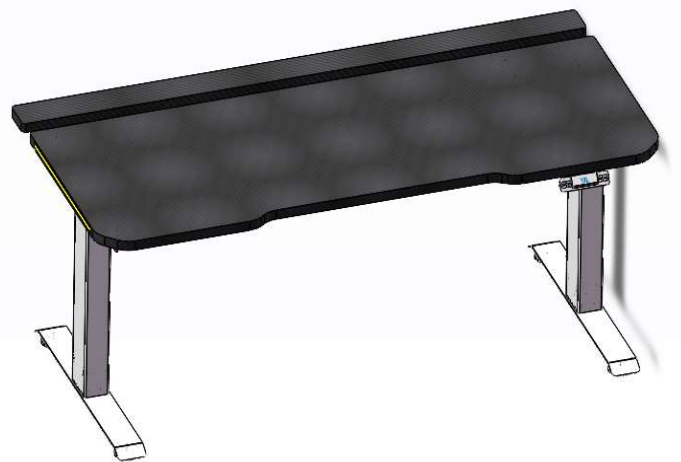


OPTIONS

- Custom colors available
- Compatible Hand Controllers: Standard / Integrated Hand Controllers
- Compatible Control Systems: Standard Control Box / Adapter / Wall-Plug Power Supply
- Multiple foot designs available


OPERATING CONDITIONS

- Duty Cycle: 10%; 2 min ON / 18 min OFF
- Operating Environment: Indoor
- Storage & Transportation Temperature: -10°C to 70°C

DIMENSION DRAWING

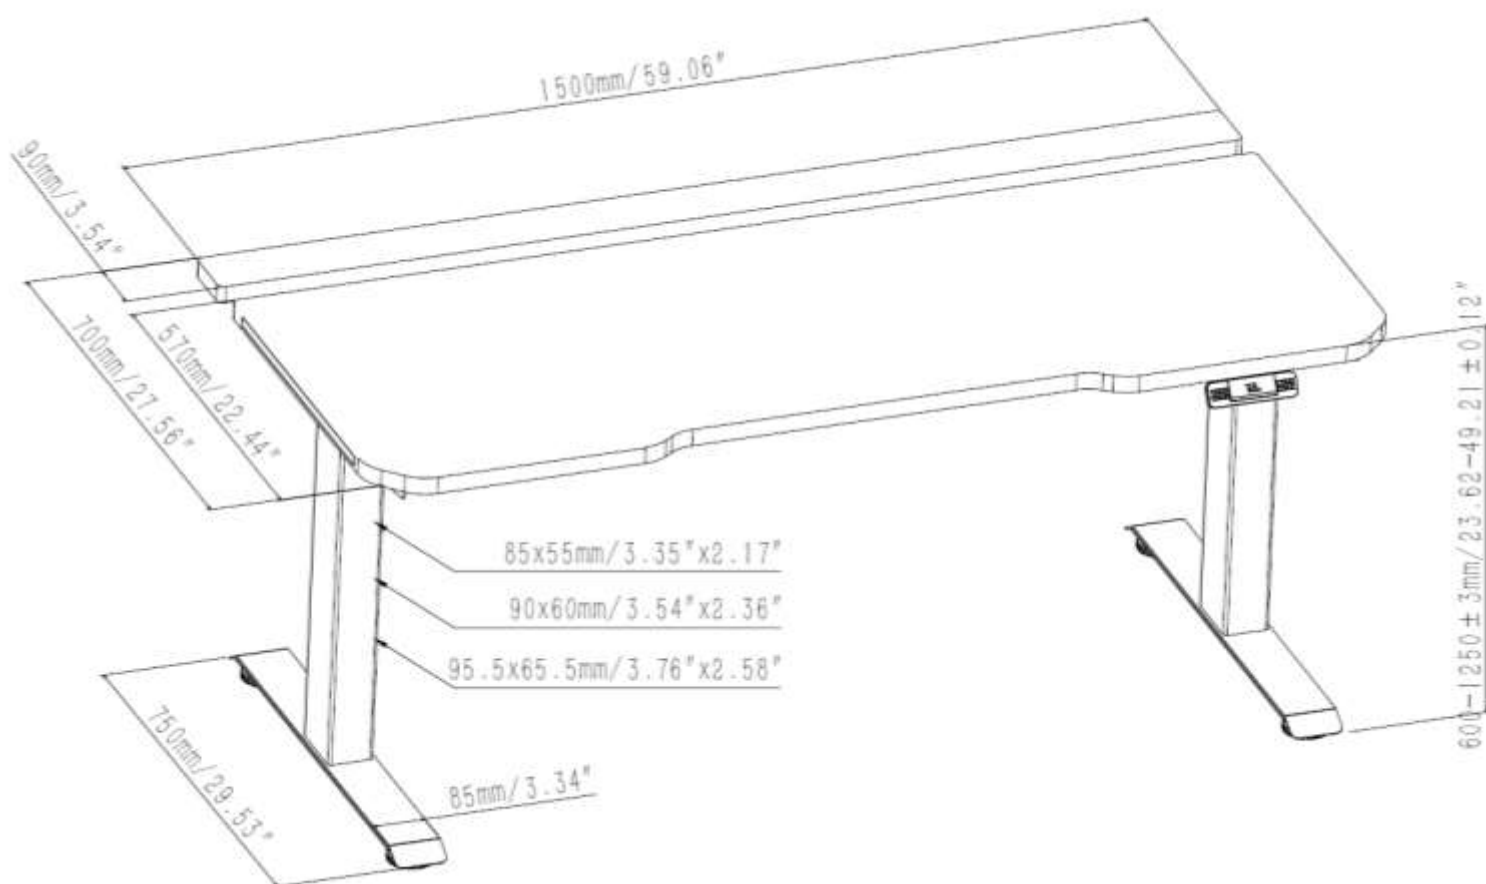

MODEL NAMING EXAMPLE

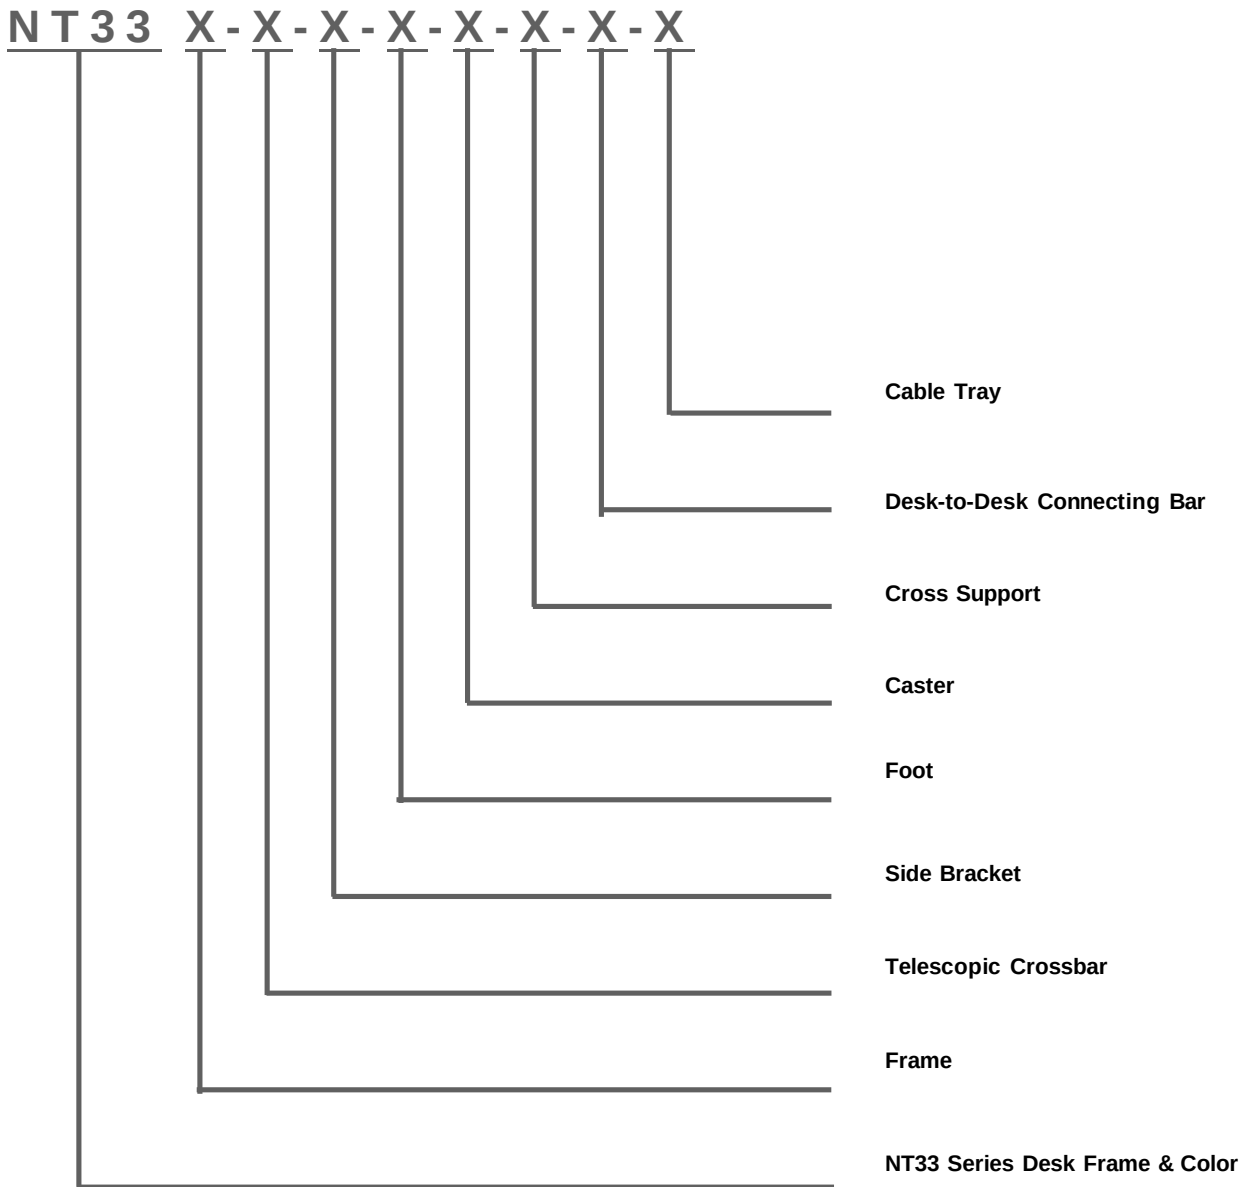

F = Hole-Free / A = Standard Orientation / R = Reverse Orientation / G = Ball Bearing