NATE



LIFTING COLUMN

URF2

Product Data Sheet

www.natekj.com

NATE DRIVE

NT33- URF2



The URF2 is a two-section , square tube with a 60 x 60mm outer diameter and no perforations, featuring a large radius.

This retractable support column is suitable for various desktop application needs; it is a standard mounting type.

The URF2 mounting hole positions are compatible with other square tube lifting columns such as the BF3A , therefore ...

Given the same desktop and feet, choose the appropriate option based on your actual needs.

The lift column. For solutions involving opposite tables, the lift column can be equipped with pads and connecting links.

Used in conjunction with the connecting rod.

The URF2 rising bollard is available in three standard color schemes (black, gray, and white), but is also available in other colors.

Other colors can be selected as needed. The column has an obstacle detection and reversing function to maximize its stability.

This reduces the risk of the standing table encountering obstacles.

The URF2 can be paired with a variety of NATE custom hand controllers, allowing customers to choose the one that best suits their needs.

Choose one with features such as USB charging, location memory, and child lock.

characteristic :

- Enhanced lifting column with optimized motor housing design, offering higher strength and stability.
- Maximum load : 800 N per lifting column
- Maximum speed: 25 mm/s (unloaded)
- Installation dimensions: 685 mm
- Travel: 500 mm
- Weight : Approximately 0.0 kg per lifting column
- Operating sound : < 50 dB
- Dimensions of the lifting bollard: 60 x 60 mm (External), 55x55mm (Internal)
- Motor housing dimensions: 183 x 147 x 49 mm
- Colors: Available colors: Black (RAL Eggshell Gloss 9005), Silver Gray (Silver Gray EM Semi-gloss 2921), White (RAL Semi-gloss 9016)
- Quiet, calm

Options :

- Optional matching table mats


use:

- Two lifting columns driven synchronously ; one controller; one manual controller.
- Duty cycle: 10% ≈ 2 minutes of continuous full-load use, then pause.
  18 minutes
- Ambient temperature: 10 to 40 °C
- Storage and transport temperature: -10 to +70°C
- For system compliance information, please refer to the "Conformity Declaration " in the User Manual.

With a fully retracted length of 685 mm and a travel length of 500 mm, the standard system offers a desktop height adjustment interval of 715 mm to 1200 mm, allowing the desk to be used for both seated and standing work.

URF2

Ordering example:

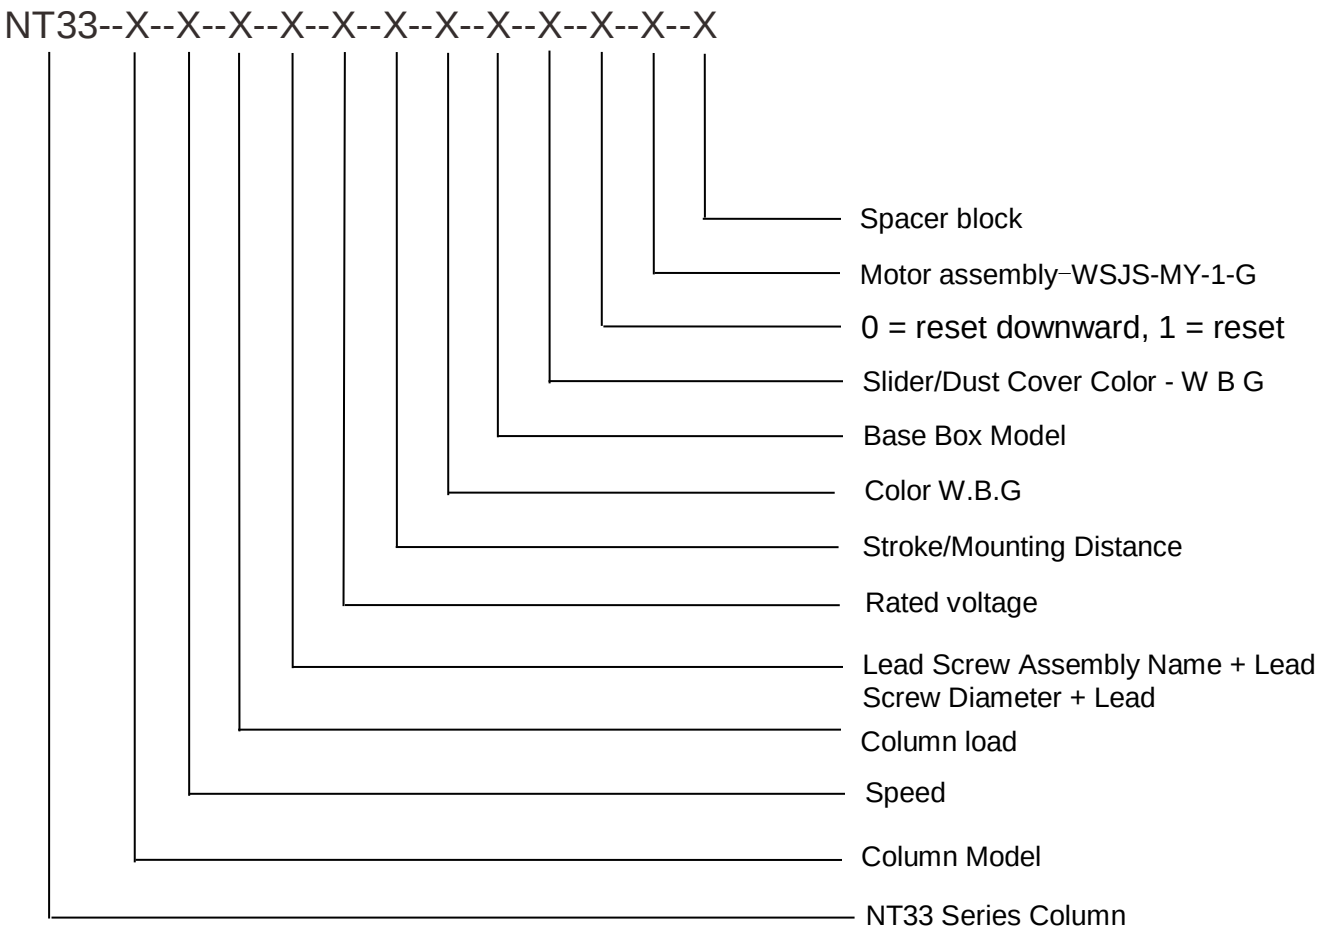


F indicates no hole, A indicates upright, and R indicates inverted.

Note that for a table, the padding blocks are used to connect the two uprights at positions A1 and A2. For a single table with added cross bracing, the padding blocks are used to connect the two uprights at position A3.

Dimensions


All measurements do not include the thickness of the powder coating.

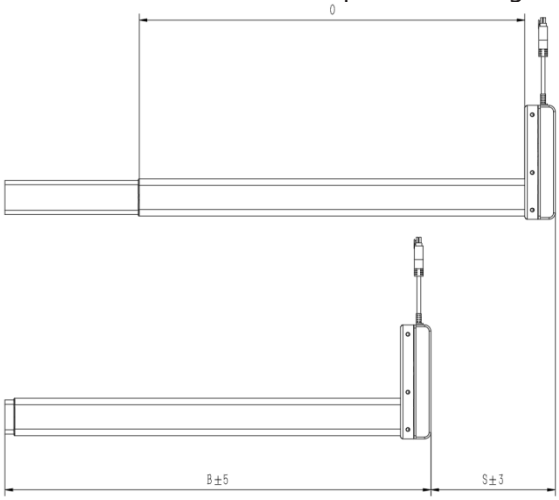


Version	Combination code	B (Installation Dimensions) [mm]	S (Itinerary) [mm]	O (outer tube length) [mm]
EU	URF2 xxxx 500 / 685	685	500	620

DL6U


RF2 installation dimensions, stroke, and outer tube length (mm)

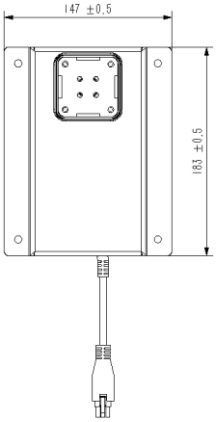


Motor housing
Outline dimensions

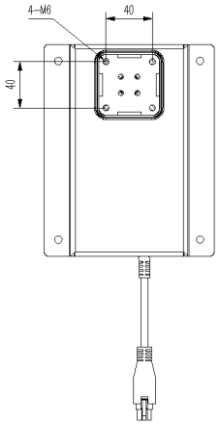

Lifting column base
mounting dimensions

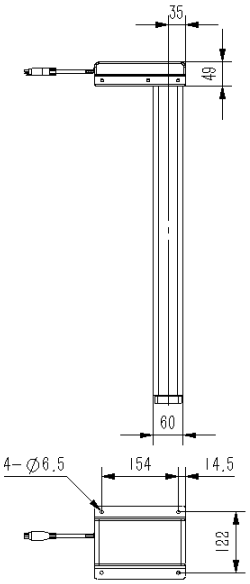



URF2 Dimensions(mm)

For installation instructions and usage guidelines, please refer to the relevant user manual.