

Height Adjustable Smart Furniture Solutions

SMART DESK SMART LIFE



NATE DRIVE
Technology

Shaoxing Naite Drive Technology CO.,Ltd

NO.68,Sanjiang Street,Shengzhou City,Zhejiang Province,China



Tel:+86-575-83007022
Email:sales@natekj.com
Fax:+86-575-83563388
Web:www.natekj.com



WHY
NATE 01

CUSTOMIZATION
POSSIBILITIES 05

FRAME
COLLECTIONS 09

NEW PRODUCT SERIES - P09
1-LEG SERIES- P11
2-LEGS SERIES - P13
3-LEGS SERIES - P19
4-LEGS SERIES - P23
ECONOMICAL SERIES - P27
MANUAL SERIES - P29
HOME OFFICE SERIES - P31

03 ABOUT
NATE

07 INNOVATIVE
INTELLIGENCE

35 MODULE

P35 - LIFT COLUMNS
P37 - HANDSETS
P39 - FEET
P40 - CONTROL BOX

41 SUSTAINABLE
DEVELOPMENT



CONTENTS

CATALOGUE

Shaoxing Naite Drive Technology Co., Ltd.,
founded in July 2013, is an innovative
enterprise specializing in the production of
ergonomic height adjustable desk, we
transmit the aesthetics of life and advocate
healthy office methods, and always take
"providing more people with a healthy office
environment " as the enterprise mission.

WHY NATE +



ENTERPRISE HONOR

As a leader of standard drafting team in China Electronics energy-saving Technology Association (CEESTA), NATE actively organized and participated in drafting the Group Standard of Electric Height Adjustable Desk.



FINE CRAFTSMANSHIP

NATE pays extremely close attention to details to create the high-quality of products. We focus on research and design, the best raw materials, precise production as well as full extensive tests.Worry-Free Warranty.



PRODUCTION CAPACITY

More than 25000m²+ physical production plant,with two production lines, efficient productivity and all kinds of qualifications, can meet the size of different customer orders at the same time. NATE is capable of timely delivery to domestic and foreign customers.



QUALITY CONTROL

NATE quantifying quality standards and precisely regulating production processes, quality problem source control,achieving quality control through comprehensive system informatization and intelligentization.



CUSTOMIZATION

With experienced engineering groups, NATE is able to customize for its customers innovation.More than 2,000 kinds of product designs are available for customers to choose from to meet the needs of customers in different office scenarios.



BETTER SERVICE

One VIP customer service, quick response and contact customer needs.Provide one-stop service, if customers need, our company can help to purchase supporting products and arrange delivery.Customer information and data will be strictly safeguarded to ensure the safety of customer information



VOICE CONTROL

NATE continuously upgrades and optimizes its products by integrating voice recognition systems with the desk control systems, truly achieving interaction between people and products.



MOBILE APP CONTROL

NATE is committed to bringing comfort to your life. With this application, you can control your office desk and track your health data. This ergonomic app combines various functions of space and health management, allowing you to effortlessly create your smart office. The application is currently available for both Android and Apple iOS operating systems and can be customized according to your preferences at any time.



SUSTAINABLE DEVELOPMENT AND ENVIRONMENTAL PROTECTION

NATE takes its corporate social responsibility seriously, which include charity organization work, employee, tax and environmental issues, We pay attention to environmental protection and your health.

ABOUT
NATE +

25000+ m²

Factory
Area

200+

Factory
Employee

80+

Partner
Countries

2013

Since

30+

R&d Engineer

100+

Patents

.....



Ca Prop65



.....



BRAND
STORY +

+

2013

Enterprise establishment
brand building

2015

Independent R&D

2017

Market Development

2020

Expand
Production Capacity

2021

Business Expansion

2022

Standardized
Management

2024


Keep Going

COMPONENT BASED CUSTOMIZED SOLUTIONS +



CUSTOMIZE YOUR COLOR

In addition to the classic black, white, and gray, you can customize desk frames, legs, and feet in almost any specific color.



DESIGN YOUR FRAME STRUCTURE

Our production presents you the option of all leg designs from square, to rectangle, to round, and oval tubes, along with our expandable frame with standard or easy assembly options, and our operating system with easily branded handsets. This can be supported further by creating a unique design foot with multiple cable management options.



INNOVATIVE INTELLIGENCE +


QUICK INSTALLATION DESIGN

Without heavy installation process, NATE provides an efficient and stable lifting product, which saves 70% installation time on the basis of the original frame system, and greatly reduces the cost of manual installation of desk.

Option A




Option B

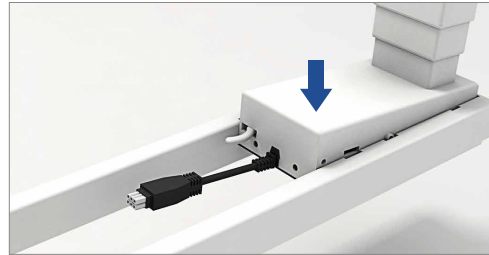


Foot Base Connection



Side Bracket Connection

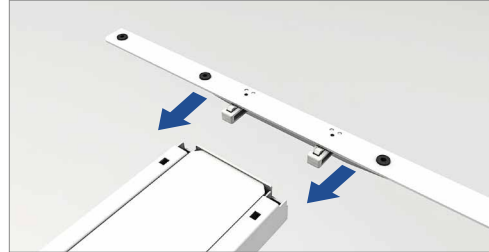


Single Motor Easy Folding Version

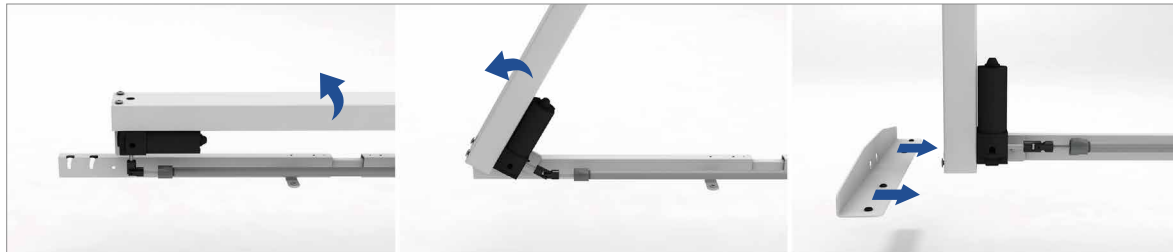

MOBILE APP CONTROL

WIFI control-Update from Bluetooth.
With this application, you can control your office desk and track your health data. The application is currently available for both Android and Apple iOS operating systems.

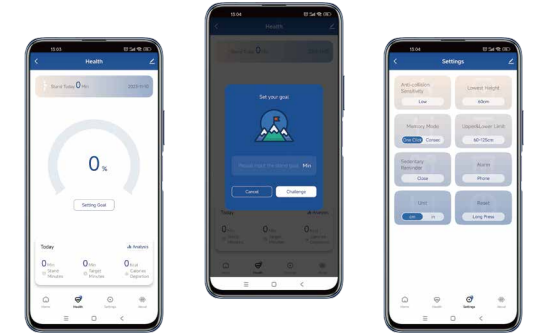

VOICE CONTROL

NATE integrates the voice recognition system with the desktop control system to truly enable human-product interaction. We offer support for a variety of third-party voice assistants, including Amazon Alexa, Google Assistant, JD Dingdong, Tencent Cloud Microenterprise, Baidu DuerOS, SmartThings and more.




New Product Series

Extended Stroke /4-stage




Standard Column



Stroke	Speed
680mm	50mm/s
Width Range	Load Capacity
1010-1750mm	80kg


Height Range
495-1175mm
Voltage
100V-240V

NT33-2BF4A

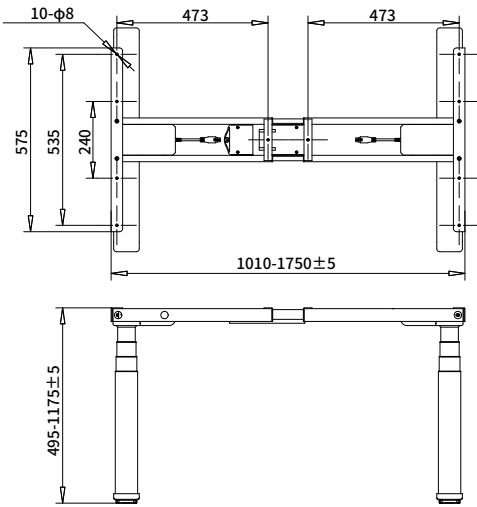


New Product Series

Quick speed-80mm/s / 3-stage




Standard Column

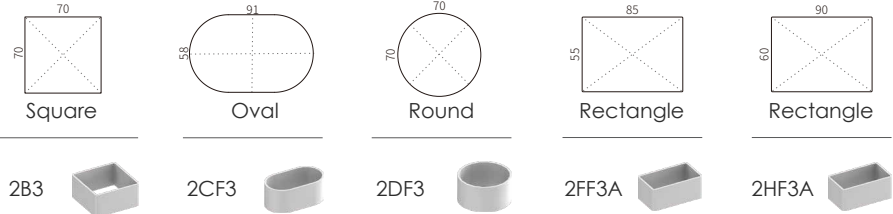

Stroke	Speed	Height Range
650mm	80mm/s	600-1250mm (650-1300mm Oval/Round)
Width Range	Load Capacity	Voltage
1010-1750mm	80kg	100V-240V

NT33-2BF3A

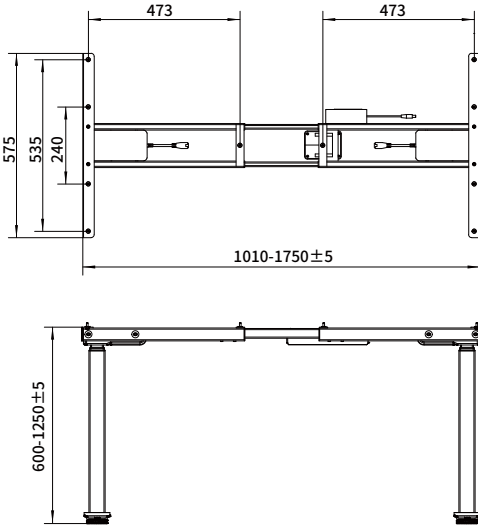

1-leg Series

Single Motor Series / 3-stage

Anti-collision ☒

Height Range(E1)

570-1220mm

Load Capacity

80kg

Height Range(E2)

635-1280mm

Voltage

100V-240V

Height Range(E3)

605-1250mm

Speed

40mm/s





NT33-E1



NT33-E2



NT33-E3

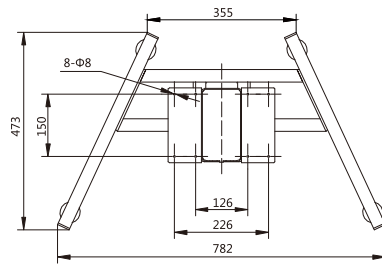


NT33-E1

NT33-E2


NT33-E3

2-legs Series

Dual Motors Series / 2-stage




Standard Column

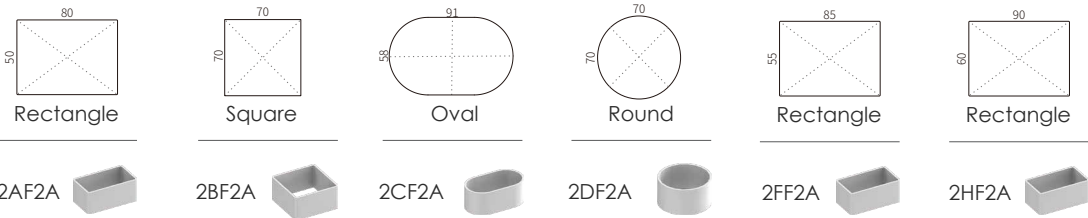


Stroke	Speed	Height Range
500mm	30mm/s	700-1200mm
Width Range	Load Capacity	Voltage
1010-1750mm	120kg	100V-240V

NT33-2CF2A

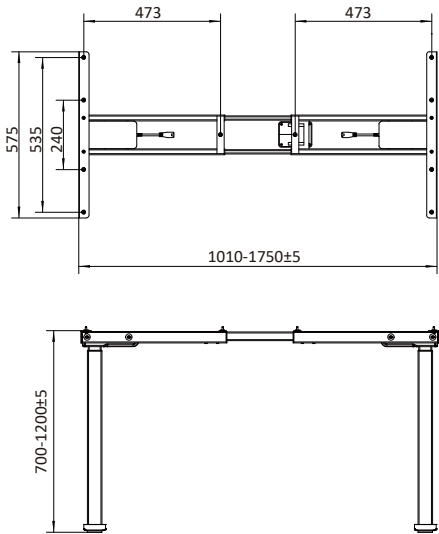


Reversed Column

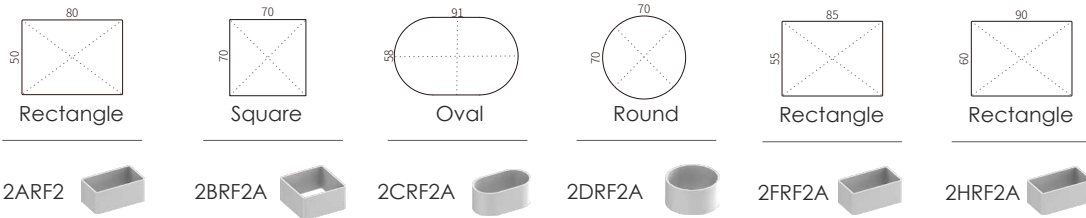

Stroke	Speed	Height Range
500mm	30mm/s	700-1200mm
Width Range	Load Capacity	Voltage
1010-1750mm	120kg	100V-240V


NT33-2ARF2

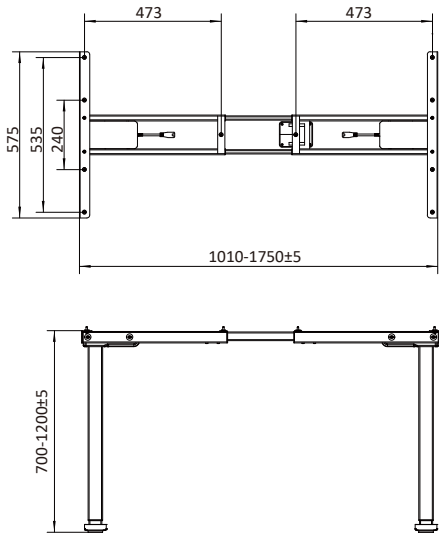




2-legs Series

Dual Motors Series / 3-stage



Standard Column

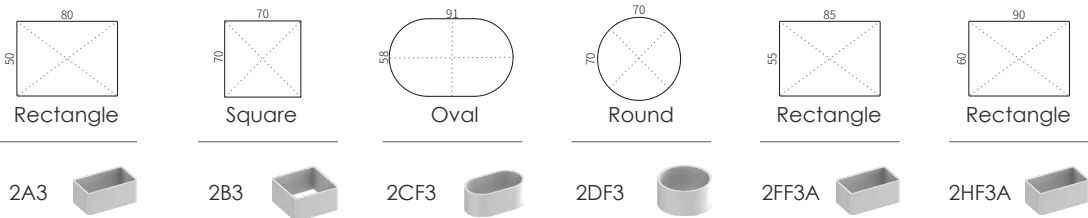

Stroke

650mm

Speed

40mm/s

Height Range

600-1250mm (650-1300mm Oval/Round)

Width Range

1010-1750mm


Load Capacity

120kg

Voltage

100V-240V

Reversed Column

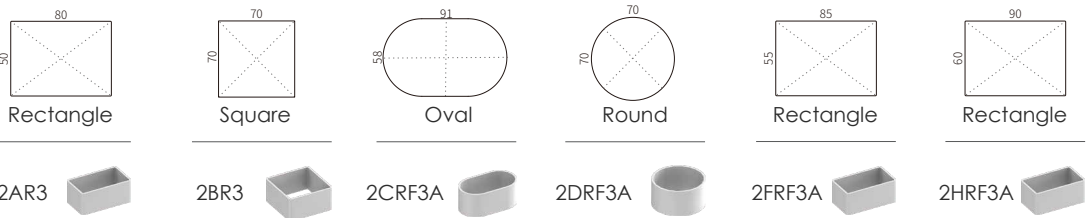

Stroke

650mm

Speed

40mm/s

Height Range

600-1250mm (650-1300mm Oval/Round)

Width Range

1010-1750mm


Load Capacity

120kg


Voltage

100V-240V

NT33-2BF3A

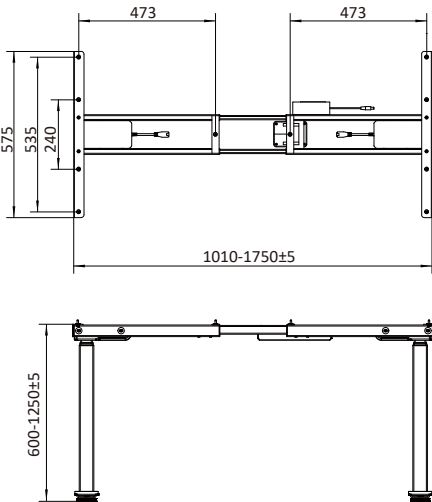


NT33-2DRF3A

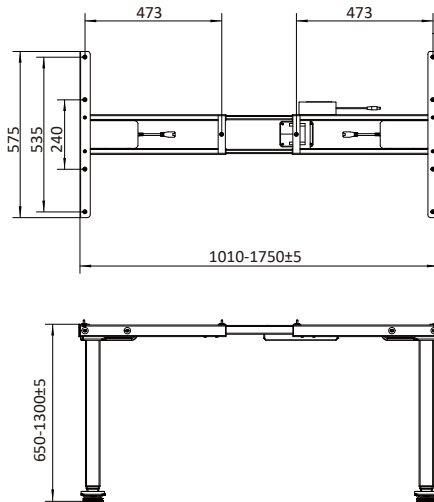


3-legs Series

Three Motors Series / 3-stage

Anti-collision ☒



Standard Column

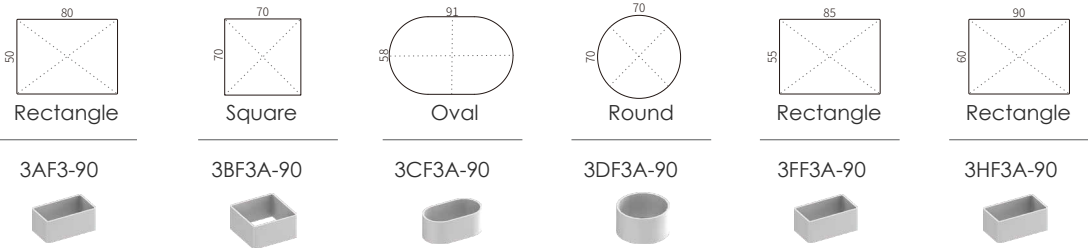

Stroke

650mm

Speed

40mm/s

Height Range

600-1250mm(650-1300mm Oval/Round)

Width Range

1010-1750mm


Load Capacity

150kg

Voltage

100V-240V

Standard Column

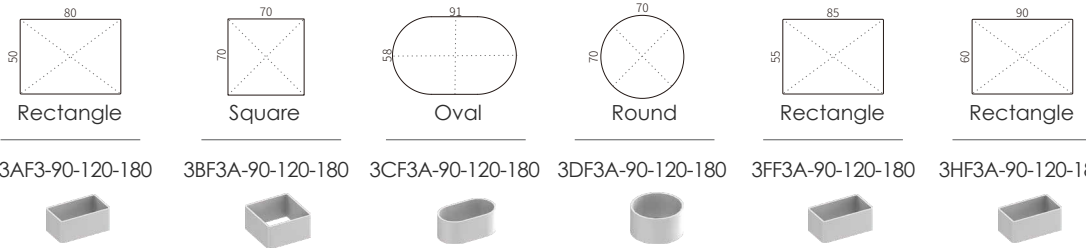

Stroke

650mm

Speed

40mm/s

Height Range

600-1250mm(650-1300mm Oval/Round)

Width Range

1010-1750mm


Load Capacity

150kg


Voltage

100V-240V

NT33-3AF3-90

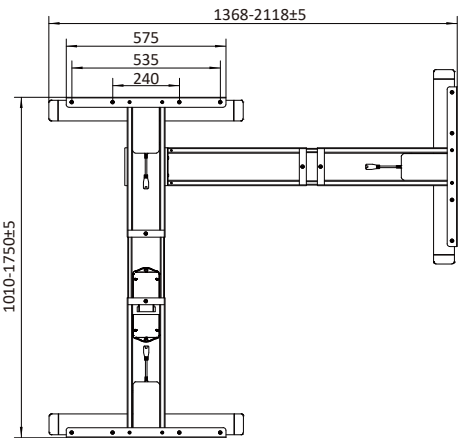

NT33-3BF3A-90-120-180

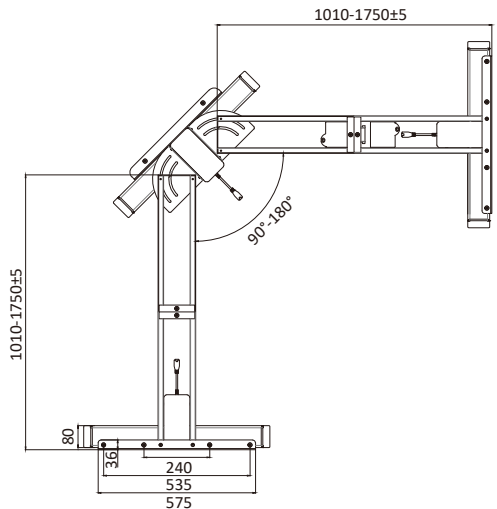





4-legs Series

Four Motors Series / 2-stage


Standard Column




Rectangle




Square




Oval



Round



Rectangle



Rectangle



4AF2



4BF2A



4CF2A



4DF2A




4FF2A



4HF2A

Stroke	Speed	Height Range
500mm	30mm/s	700-1200mm
Width Range	Load Capacity	Voltage
1010-1750mm	200kg	100V-240V


NT33-4DF2A

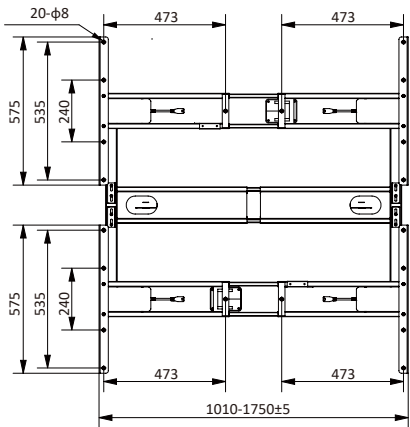


4-legs Series

Four Motors Series / 3-stage


Anti-collision ☒




Standard Column




Rectangle




Square




Oval



Round



Rectangle



Rectangle



4AF3



4BF3A



4CF3A



4DF3A




4FF3A



4HF3


Stroke	Speed	Height Range
650mm	40mm/s	600-1250mm (650-1300mm Oval/Round)
Width Range	Load Capacity	Voltage
1010-1750mm	200kg	100V-240V

NT33-4BF3A

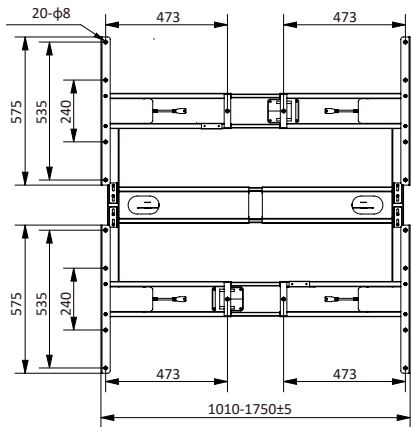


4-legs Series

Four Motors Series / Dining table / 3-stage



Standard Column



Stroke

650mm

Speed

40mm/s

Height Range

595-1245mm

Width Range

1636-2406mm


Load Capacity

200kg

Voltage


100V-240V

NT33-Z4W

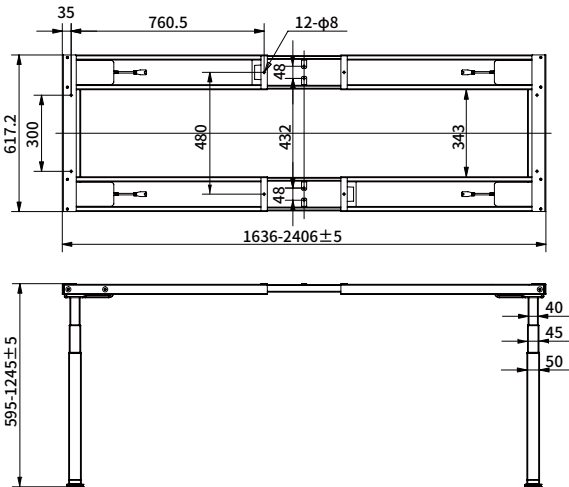

4-legs Series

Two Motors Series / Dining table / 2-stage



Reversed Column



Stroke

440mm

Speed

20mm/s

Height Range

710-1150mm

Width Range

1100-1800mm


Load Capacity

100kg

Voltage


100V-240V

NT33-CZ

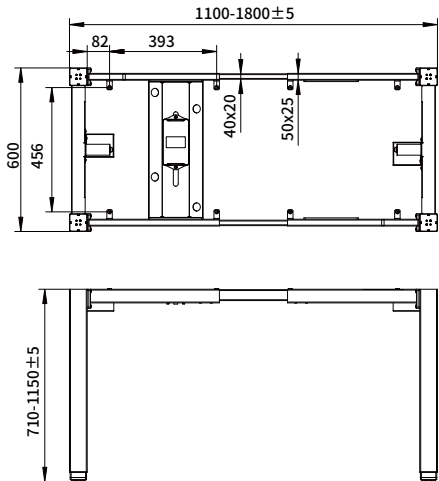

Economical Series

Single Motor Series / 2-stage




Stroke	Height Range
440mm	710-1150mm
Width Range	Load Capacity
1105mm	80kg
Speed	Voltage
20mm/s	100V-240V

Stroke	Height Range
440mm	700-1140mm
Width Range	Load Capacity
990-1400mm	70kg
Speed	Voltage
20mm/s	100V-240V


Stroke	Height Range
440mm	700-1140mm
Width Range	Load Capacity
850-1300mm	80kg
Speed	Voltage
20mm/s	100V-240V

Stroke	Height Range
440mm	700-1140mm
Width Range	Load Capacity
934-1254mm	70kg
Speed	Voltage
15mm/s	100V-240V


NT33-2S2-2

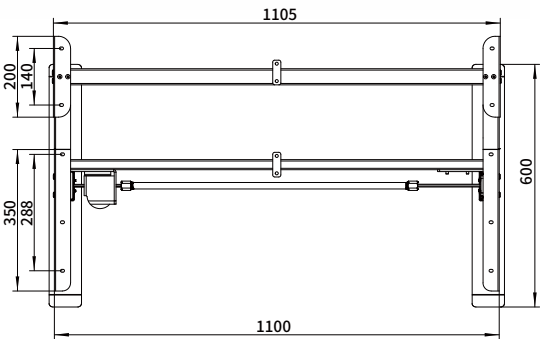


NT33-2S2G

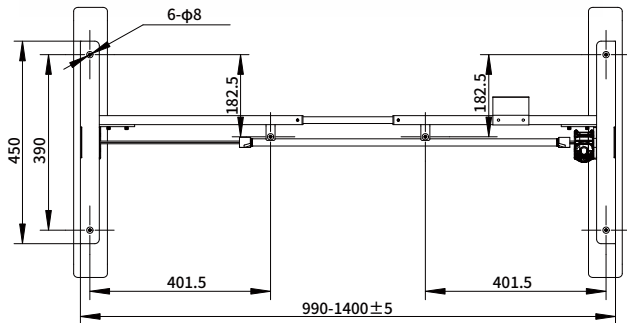

NT33-SR2B (ADJUSTABLE WIDTH)

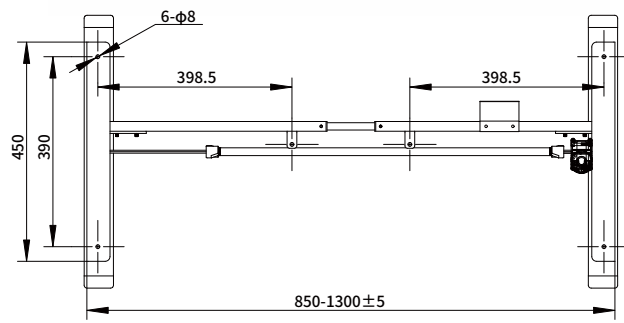


NT33-SR2D (ADJUSTABLE WIDTH)

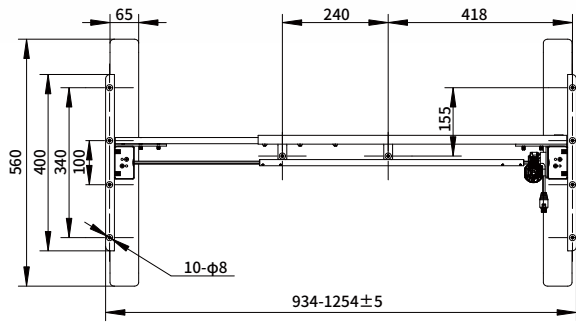

Manual Series


Hand Crank / 2-stage




Stroke	Speed
450mm	12 mm/circl
Width Range	Load Capacity
986mm /1000-1400mm	80kg

Height Range
710-1160mm

NT33-2M2B (FIXED WIDTH)

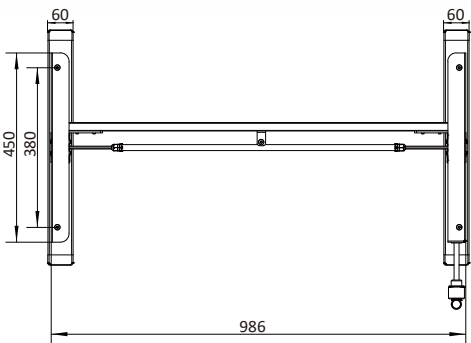


NT33-2M2B (ADJUSTABLE WIDTH)

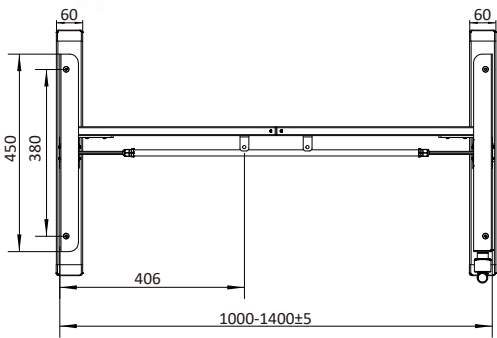

Home Office Series

Glass Table Series / 2-stage



Stroke

500mm

Height Range

710-1210mm

Top Size

1200x600mm

Load Capacity

100kg

Speed


30mm/s

Voltage

100V-240V


NT33-E4

🔌 Type-A*1 (18W)

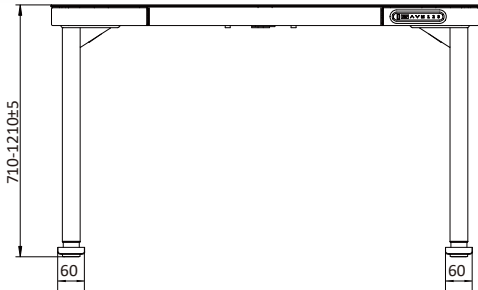

NT33-E4Pro


⚡ Wireless Charging*1 (10W)
🔌 Type-C*1 (18W)
🔌 Type-A*2 (18W)

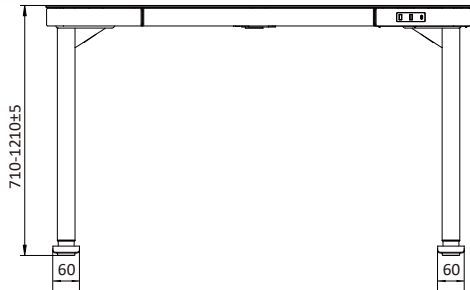



Home Office Series


Wooden Table Series / 2-stage



Stroke	Height Range	Speed
500mm	710-1210mm	30mm/s
Top Size	Load Capacity	Voltage
1200x600mm/ 1400x700mm	100kg	100V-240V


NT33-E4(A)

- Type-C*2 (18W)
- Type-A*1 (18W)

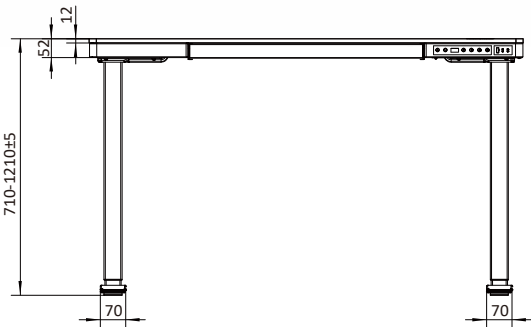

NT33-E4(A)Pro

- Wireless Charging*1 (10W)
- Type-C*1 (18W)
- Type-A*2 (18W)

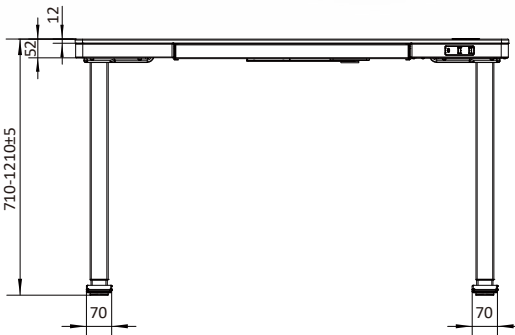

LIFT COLUMNS



LOAD CAPACITY	50KG
SEGMENT	4 Stage
STROKE	680mm
HEIGHT	460-1140mm
TUBE SIZE	55*55-60*60-65*65-70*70mm
SPEED	50mm/s
LIFTING DIRECTION	Standard

LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	60*60-70*70mm
SPEED	30mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	50*83-58*91mm
SPEED	30mm/s
LIFTING DIRECTION	Standard




LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	φ63.5-φ70mm
SPEED	30mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	45*75-50*80mm
SPEED	30mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	40*70-45*75-50*80mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	50*50-60*60-70*70mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	50*50-60*60-70*70mm
SPEED	80mm/s NEW
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	600-1250mm
TUBE SIZE	42*75-50*83-58*91mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	600-1250mm
TUBE SIZE	φ57-φ63.5-φ70mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	45*75-50*80mm
SPEED	30mm/s
LIFTING DIRECTION	Reverse




LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	40*70-45*75-50*80mm
SPEED	40mm/s
LIFTING DIRECTION	Reverse



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	50*50-60*60-70*70mm
SPEED	40mm/s
LIFTING DIRECTION	Reverse



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	45*75-50*80-55*85mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	2 Stage
STROKE	500mm
HEIGHT	665-1165mm
TUBE SIZE	55*85-60*90mm
SPEED	30mm/s
LIFTING DIRECTION	Standard



LOAD CAPACITY	80KG
SEGMENT	3 Stage
STROKE	650mm
HEIGHT	565-1215mm
TUBE SIZE	50*80-55*85-60*90mm
SPEED	40mm/s
LIFTING DIRECTION	Standard



HANDSETS

Choose The Best Handset Options For Your Frame!

NATE offers a variety of easily branded Handsets in different designs with a wide range of functions.

Define your requirement, choose your design, and soon you will be moving further with your new table.

NT33-HV

- OLED Screen
- UP DOWN Paddle
- 2 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Type C-quick charge
- LED Light (Green/Orange/white)
- Time Reminder
- Multiple languages available ENG,DE,FR,ES,IT.
- Logo on start up



NT33-BHR

- Handset Integrated
- Digital LED Screen
- Six Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- USB Port



NT33-BHP

- Handset Integrated
- Digital LED Screen
- Six Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- USB Port



NT33-BHH

- Handset Integrated
- Digital LED Screen
- Six Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment



Reminder

NT33-BHG

- Handset Integrated
- Digital LED Screen
- Eight Button
- 4 Memory Preset
- Child Lock
- Time Reminder
- Anti-collision
- One Touch Adjustment
- Type C-quick charge



NT33-H1B

- Digital LED Screen
- Two Button-UP Down
- Anti-collision



NT33-HF

- UP DOWN Button
- Anti-collision



NT33-HB

- Digital LED Screen
- Seven Button
- 4 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- USB+Type C-quick charge



NT33-HE

- Digital LED Screen
- Seven Button
- 4 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- USB Port



NT33-HH

- Digital LED Screen
- Seven Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- USB Port
- Recessed Into Table Top



Reminder

NT33-HK

- Digital LED Screen
- Seven Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Time Reminder
- USB Port



Reminder

NT33-HZ

- Digital LED Screen
- Seven Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Time Reminder
- USB+Type C-quick charge



NT33-HU

- Digital LED Screen
- Six Button
- 3 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Type C-quick charge



Reminder

NT33-HW

- Digital LED Screen
- Eight Button
- 4 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Type C-quick charge
- Time Reminder



NT33-H1D

- Digital LED Screen
- Five Button
- 2 Memory Preset
- Child Lock
- Anti-collision
- One Touch Adjustment
- Type C-quick charge
- LED Light Background

FEET


FA03B

DIMENSION	700x75x20mm
PLATE THICKNESS	2.5mm/2.5mm
FIT TUBE	Rectangle(80*50)

CONTROL BOX

NT33-BK

- 2 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA,total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

				
DIMENSION	FA22	FB18	FC04	FR46
PLATE THICKNESS	600x750x18mm	700x80x18mm	600x80x20mm	560x65x17mm
FIT TUBE	2.5mm/2.0mm	2.5mm/3.0mm	2.5mm/2.5mm	2.0mm/2.0mm
	Rectangle(80*50)	Square	Oval,Round	Rectangle(80*50)

				
DIMENSION	FR30	FA55	FA67	FC06
PLATE THICKNESS	560x60x20mm	560x60x20mm	60x70x20mm	700x85x20mm
FIT TUBE	2.0mm	2.0mm	2.0mm	3.0mm/3.0mm
	Rectangle(80*50)	Rectangle(80*50)	Rectangle(80*50)	Oval

FIT TUBE				
	LJK-A	LJK-H/F	LJK-B	LJK-D
	Rectangle(80*50)	Rectangle(85*55,90*60)	Square(70*70)	Round(70*70)
DIMENSION				
SCREW THREAD	JLD	JLE	HLA	HLD
	φ50	φ65	φ40	φ50
	M8*14	M8*14	M8*15	M8*15



NT33-BA

- 2 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA, total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BD

- 2 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 28-32V
- Output: 18-26V
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BB

- 1 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 100-240V 50-60Hz,2.5A
- Output: 24Vdc,each 100VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BO

- 4 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 220-240VAC 50-60Hz,5A
- Output: 30Vdc,each 3A,total 12A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BC

- 3 legs supported
- Energy saving during non-use
- Low standby power consumption: <0.3w
- Input: 100-240V 50-60Hz,10.5A
- Output: 30Vdc,each 3.5A, total 10.5A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

ENVIRONMENTAL SUSTAINABILITY

Reduce Desk Consumption

One desk can concurrently satisfy every family member or colleague with different body height, desk with metal frame can use for longer years.



Standby Power <0.3W

The most important part of an height adjustable desk is the control box, and its standby power is the key to reduce energy consumption of entire system.



Environmental Protection Certificate

We have passed RoHs, REACH, WEEE certificate. Use eco-friendly materials, care for the environment.



Continuous Product Upgrade

We always insist on developing eco-friendly products with less environmental wastes.



Digital Management

Use ERP system and other digital tools to reduce waste like paper, increase efficiency.



Permanent Magnet Air Compressor

Save electric energy 33 thousand kwh per year.



Lighting Energy Saving

Use energy-efficient light to reduce electric energy.



Integration Of Informatization And Industrialization

Integration of Informatization and Industrialization-Management system certificate, adjust our industrial structure and develop new emerging industries such as High-tech enterprises.



ISO14001 and Clean Production Report

We have passed Environmental Management System Certificate and Clean Production Report every year to prove that we insist on sustainability of environment.



SOCIAL SUSTAINABILITY

Employee Care

In addition to the compulsory insurance, NATE provides other fringe benefits too, such as accident insurance, health insurance, bonus, paid annul leave etc.
Improved Education & skill ability, Providing inclusive training to employees.



Social Responsibility

NATE actively contributes to society, to help the poor families, pass love and warmth.
Donating to help the needy people as well as sudden disasters, like epidemic in Wuhan, earthquake in Gansu.



BSCI And ISO45001

We have passed BSCI and Iso45001 to protect employers' health and rights.



ISO14604 Certificate

NATE will continuously monitor the GHG(Greenhouse Gas) emissions in the operation of the enterprise. In the future, we will continue to reduce and achieve the goal of "carbon neutrality" or "zero carbon emissions" by improving the manufacturing process and our product performance.

